

MACtouch T 4023 T


GENERAL INTRODUCTION

MACtouch is a double-sided adhesive system especially designed for the assembly of membrane switches. The range consists of mounting tapes and spacer tapes of different thicknesses.

All these products have superior stay-flat and die-cutting properties. They are available in roll and sheet form.

PRODUCT DESCRIPTION

MACtouch T 4023 T consists of a 12 μ polyester film coated on both sides with a solvent based pure acrylic adhesive. It offers high tack, high peel properties and high shear resistance.

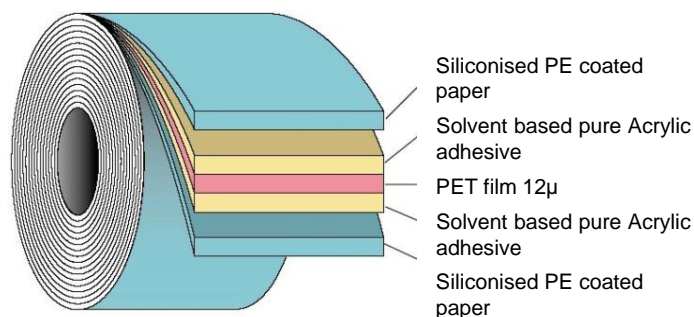

MACtouch T 4023 T is protected by 2 moisture stable paper liners.

TYPICAL APPLICATION

Assembly of Membrane Switch Panels.

Automotive: fixing mirrors onto suitable mounting plates, sensors for security airbags.

CHARACTERISTICS

Adhesion with Substrates

Metal / Aluminium	High	Acrylic / PET	Medium
Glass / Ceramics	High	Polystyrene	Medium
Painted Surface	High	PP / PE / PS	Medium
Wood / Board / Paper	Medium	Textile / Cotton	Medium
Soft PVC	Medium	Rubber / EPDM	Medium
Rigid PVC	Medium	Smooth Substrate	Medium
PC / ABS	High	Rough Substrate	Medium

Chemical Properties

Copper corrosiveness	N.A.	Resistant to:	
Chlorine contents (ppm)	< 100	Water	Good
Sulphur contents (ppm)	< 100	Detergents	Good
		Dilute acids & alkalis	Good
		Concentrated alkalis	Poor
		Concentrated acids	Poor
		Aliphatic hydrocarbons	Good
		Ketones & esters	Fair
		Chlorinated hydrocarbons	Poor
		Aromatic Hydrocarbons	Poor

SHELF LIFE

2 years when stored at 15/25° C and 50 % relative humidity.

ADDITIONAL INFORMATION

IMDS – automotive registration: T 4023 T has been introduced in the IMDS (International Material Data System)

Electrical Properties

Dielectric strength (Kv/mm)	At 23°C (50Hz)	380	DIN 40634	
	Surface resistivity (Ω)	At 23°C (50% RH)	> 10 ¹⁴ (*)	DIN 53482
		Volume resistivity (Ω cm)	At 23°C	10 ¹⁸ (*)
	Permittivity		At 23°C (50Hz)	3.3
		At 23°C (1 KHz)	3.3	
		At 23°C (1MHz)	3.2	
		At 0°C (50Hz)	3.3	
		At 50°C (50Hz)	3.3	
		At 100°C (50Hz)	3.3	
		At 150°C (50Hz)	3.6	
	Power factor	At 23°C (50Hz)	0.002	DIN 40634
		At 23°C (1 KHz)	0.005	
		At 23°C (1 MHz)	0.021	
At 0°C (50Hz)		0.004		
At 50°C (50Hz)		0.001		
At 100°C (50Hz)		0.007		
At 150°C (50Hz)		0.005		

(*) Measured on a 12μ thick foil

ADHESIVE DATA

	Typical Values (*)	Test Method
Quick Tack (N/25mm)		
On brushed stainless steel (ref. Nokoro 304 poli. N°4)	19	FTM 9
Peel 180° - (N/25mm)		
On brushed stainless steel (ref. Nokoro 304 poli. N°4)	20	FTM 1
- after 20 minutes	21	FTM 1
- After 24 hours		
Shear on brushed stainless steel (ref. Nokoro 304 poli. N°4) 1kg – 25mmx25mm (hours)	> 1000	FTM 8

CARRIER DATA

	Typical Values (*)	Test Method
Thickness (μ)	12	ISO 534
Tensile (N/15mm)	MD 25 CD 27	DIN 53455
Elongation (%) (max.)	MD 180 CD 180	DIN 53455

TEMPERATURE RESISTANCE

Minimum Application Temperature	+ 5°C
End-use temperature range	- 40°C to + 180°C

For temperatures outside those quoted above, please consult with Mactac.

RELEASE LINER**THICKNESS**
(Carrier + adhesive)

1. Silicone paper white of 100 gr/sqm, non printed	ISO 536
2. Silicone paper brown of 100 gr/sqm, non printed	ISO 536
88 μ	ISO 534

(*) Values given are typical and are not necessarily for use in specifications.

IMPORTANT NOTICE

All Mactac products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning Mactac products are based upon research which the Company believes to be reliable but such information do not constitute a warranty. Because of the variety of possible uses for Mactac products and the continuing development of new uses, the purchaser should carefully consider the fitness and performance of the product for each intended use and the purchaser assumes all risks in connection with such use. Seller shall not be liable for damages in excess of the purchase price of the product or for incidental or consequential damages. All specifications are subject to change without prior notice.

